



12/20 kV or 12.7/22 kV XLPE insulated double steel tape armoured, three core cables with aluminium conductor

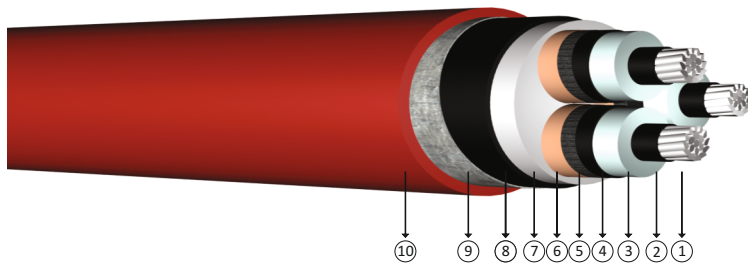

Code: YAXC8VZ4V-R, NA2XSEYBY, AL/XLPE/CTS/PVC/STA/PVC

R: Stranded Conductor Rigid

Standards: IEC 60502 - 2, VDE 0276-620, BS 6622

Technical Data

Max. operating temperature : 90 °C
 Max. short circuit temperature : 250 °C (max. 5 sec.)
 Rated voltage : 12/20 kV
 12.7/22 kV
 Min. bending radius : 15 x D
 D : Cable outer diameter

Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts.

Construction

- 1 Stranded aluminium conductor
- 2 Inner semi conductive layer
- 3 XLPE insulation
- 4 Outer semi conductive layer
- 5 Semi conductive tape
- 6 Copper screen
- 7 Filler
- 8 Inner sheath
- 9 Galvanized steel tape
- 10 PVC outer jacket

DIMENSION AND WEIGHTS				ELECTRICAL PROPERTIES				
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	Operation Inductance (approx)	Operation Capacitance (approx)	Current Carrying Capacity (A)	
mm ²	mm	kg/km	m	ohm/km	mH/km	µF/km	In ground at 20 °C	In air at 30 °C
3x35/16	61,0	5366	1000	0,868	0,416	0,141	-	-
3x50/16	63,5	5816	500	0,641	0,395	0,155	168	171
3x70/16	67,6	6585	500	0,443	0,373	0,172	207	211
3x95/16	71,7	7409	500	0,320	0,355	0,191	247	255
3x120/16	75,0	8115	500	0,253	0,340	0,209	282	297
3x150/25	78,8	8966	500	0,206	0,329	0,225	316	334
3x185/25	84,0	10882	500	0,164	0,319	0,243	359	384
3x240/25	89,8	12409	250	0,125	0,304	0,273	420	454
3x300/25	94,4	13771	250	0,100	0,295	0,296	476	513
3x400/35	102,5	16162	250	0,0778	0,284	0,331	552	593

Note : Current carrying capacities are valid under the following conditions;
 In ground : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7
 In air : 30 °C, load factor 1.0
 Number of system : 1