


18/30 kV XLPE insulated, longitudinally sealed,
single core cables with aluminium conductor

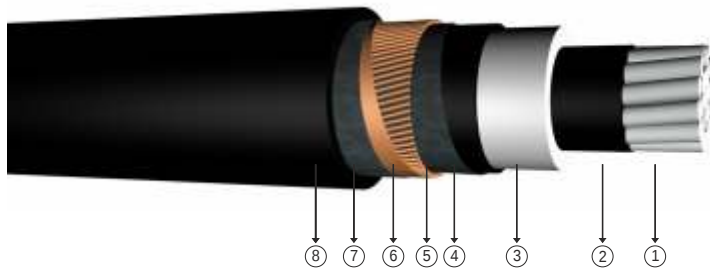

Code: NA2XS(F)2Y

Standards: VDE 0276 - 620

Technical Data

Max. operating temperature : 90 °C
Max. short circuit temperature : 250 °C (max. 5 sec.)
Rated voltage : 18/30 kV

Min. bending radius : 15 x D
D : Cable outer diameter

Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts. If the cable gets water inside due to the mechanical damages, swellable tapes prevent the movement of the water inside the cable.

Construction

- 1 Stranded aluminium conductor 3 XLPE insulation 5 Semi conductive swelling tape 7 Swellable tape
2 Inner semi conductive layer 4 Outer semi conductive layer 6 Copper screen 8 PE outer jacket

DIMENSION AND WEIGHTS			ELECTRICAL PROPERTIES									
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	DC Conductor Resistance at 90 °C Max	Operation Inductance		Operation Capacitance	Current Carrying Capacity (A)			
mm ²	mm	kg/km	m	ohm/km	ohm/km	*** mH/km	** mH/km	µF/km	In ground at 20 °C		In air at 30 °C	
									***	**	***	**
1x50/16	34,2	974	1000	0,641	0,8205	0,660	0,448	0,135	146	175	217	187
1x70/16	35,8	1088	1000	0,443	0,5670	0,629	0,423	0,151	238	214	270	232
1x95/16	37,4	1210	1000	0,320	0,4096	0,605	0,405	0,166	284	256	328	281
1x120/16	38,9	1331	1000	0,253	0,3238	0,586	0,391	0,180	322	290	378	323
1x150/25	40,2	1530	1000	0,206	0,2637	0,568	0,379	0,194	355	324	425	365
1x185/25	42,0	1693	1000	0,164	0,2099	0,552	0,367	0,208	400	366	485	418
1x240/25	44,5	1932	1000	0,125	0,1600	0,532	0,354	0,229	461	426	572	494
1x300/25	46,6	2170	1000	0,100	0,1280	0,515	0,343	0,248	516	479	649	564
1x400/35	49,5	2597	1000	0,0778	0,1009	0,494	0,330	0,276	572	545	737	654
1x500/35	53,0	3015	1000	0,0605	0,0774	0,478	0,320	0,301	638	614	835	747
1x630/35	57,0	3567	1000	0,0469	0,0600	0,461	0,310	0,330	728	690	950	851

Note
In ground : Current carrying capacities are valid under the following conditions;
In air : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7
*** : 30 °C, load factor 1.0
*** : Flat formation, clearance between cables; in air = 1 x Cable outer diameter, in ground = 7 cm
*** : Trefoil formation
Number of system : 1