


OUTDOOR AERIAL CABLES | Unfilled Suspended Rope Subscriber Cables
(KPD-P-A / PD-P-A)

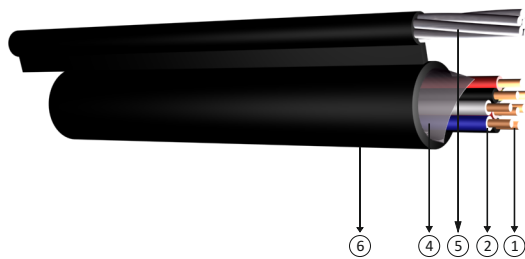

Application

They are generally used to transmit the telephone line on aerial poles to subscribers in rural places and out of town.

Construction

Conductor : Annealed Copper Wire

Insulation : Foamed Polyethylene / Solid Polyethylene

Outer Sheath : LDPE

Construction

- 1 Conductor
- 2 Insulation
- 3 Cable Core
- 4 Core Covering
- 5 Messenger
- 6 Outer Sheath

Conductor Diameter (mm)	Number of Pairs (mm)	Cable Diameter (mm)	Diameter Over Messenger (mm)	Net Weight (kg/km)	Drum Length (m)
0,5	2	5,2	12,1	47	500
0,5	4	7,1	15,1	85	1000
0,5	6	8,0	16,0	96	1000
0,5	10	8,2	16,5	121	1000